'46A, '47A, 'LS47 feature

- Open-Collector Outputs
  Drive Indicators Directly
- Lamp-Test Provision
- Leading/Trailing Zero Suppression


'48, 'LS48 feature

- Internal Pull-Ups Eliminate
  Need for External Resistors
- Lamp-Test Provision
- Leading/Trailing Zero Suppression


'LS49 feature

- Open-Collector Outputs
- Blanking Input


SN5446A, SN5447A, SN54LS47, SN5448, SN54LS48 . . . J PACKAGE SN7446A, SN7447A, SN7448 . . . N PACKAGE SN74LS47, SN74LS48 . . . D OR N PACKAGE (TOP VIEW)




SN54LS49 . . . J OR W PACKAGE SN74LS49 . . . D OR N PACKAGE (TOP VIEW)



SN54LS47, SN54LS48 . . . FK PACKAGE (TOP VIEW)



SN54LS49 . . . FK PACKAGE (TOP VIEW)




NC - No internal connection

#### All Circuit Types Feature Lamp Intensity Modulation Capability

		DRIVER O	UTPUTS		TYPICAL	
TYPE	ACTIVE	OUTPUT	SINK	MAX	POWER	PACKAGES
	LEVEL	CONFIGURATION	CURRENT	VOLTAGE	DISSIPATION	
SN5446A	low	open-collector	40 mA	30 V	320 mW	J, W
SN5447A	low	open-collector	40 mA	15 V	320 mW	J, W
SN5448	high	2-kΩ pull-up	6.4 mA	5.5 V	265 mW	J,W
SN54LS47	low	open-collector	12 mA	15 V	35 mW	J, W
SN54LS48	high	2-kΩ pull-up	2 mA	5.5 V	125 mW	J, W
SN54LS49	high	open-collector	4 mA	5.5 V	40 mW	J, W
SN7446A	low	open-collector	40 mA	30 V	320 mW	J, N
SN7447A	low	open-collector	40 mA	15 V	320 mW	J, N
SN7448	high	2-kΩ pull-up	6.4 mA	5.5 V	265 mW	J, N
SN74LS47	low	open-collector	24 mA	15 V	35 mW	J, N
SN74LS48	high	2-kΩ pull-up	6 mA	5.5 V	125 mW	J, N
SN74LS49	high	open-collector	8 mA	5.5 V	40 mW	J, N

#### logic symbols†

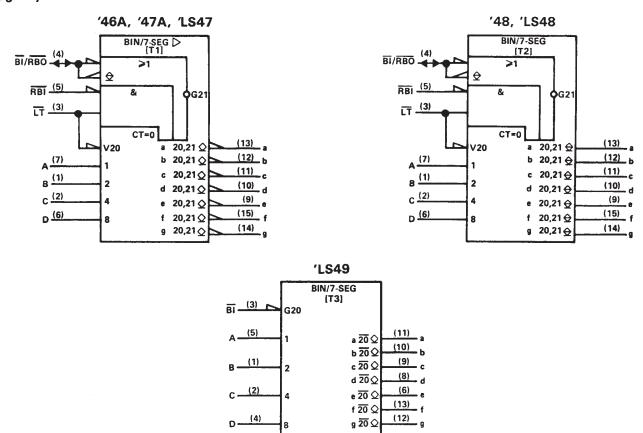

<sup>&</sup>lt;sup>†</sup>These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for D, J, N, and W packages.




#### description

The '46A, '47A, and 'LS47 feature active-low outputs designed for driving common-anode LEDs or incandescent indicators directly. The '48, 'LS48, and 'LS49 feature active-high outputs for driving lamp buffers or common-cathode LEDs. All of the circuits except 'LS49 have full ripple-blanking input/output controls and a lamp test input. The 'LS49 circuit incorporates a direct blanking input. Segment identification and resultant displays are shown below. Display patterns for BCD input counts above 9 are unique symbols to authenticate input conditions.

The '46A, '47A, '48, 'LS47, and 'LS48 circuits incorporate automatic leading and/or trailing-edge zero-blanking control  $(\overline{RBI} \text{ and } \overline{RBO})$ . Lamp test  $(\overline{LT})$  of these types may be performed at any time when the  $\overline{BI/RBO}$  node is at a high level. All types (including the '49 and 'LS49) contain an overriding blanking input (BI), which can be used to control the lamp intensity by pulsing or to inhibit the outputs. Inputs and outputs are entirely compatible for use with TTL logic outputs.

The SN54246/SN74246 and '247 and the SN54LS247/SN74LS247 and 'LS248 compose the  $\,\Box\,$  and the  $\,\Box\,$  with tails and were designed to offer the designer a choice between two indicator fonts.



'46A, '47A, 'LS47 FUNCTION TABLE (T1)

DECIMAL OR			INP	JTS			BI/RBO†			0	UTPUT	s			NOTE
FUNCTION	LT	RBI	D	С	В	Α		а	ь	С	d	е	f	g	
0	Н	Н	L.	L	L	L	Н	ON	ON	ON	ON	ON	ON	OFF	
1	н	×	L	L	L	Н	н	OFF	ON	ON	OFF	OFF	OFF	OFF	
2	н	x	L	L	Н	L	н	ON	ON	OFF	ON	ON	OFF	ON	
3	Н	×	L	L	Н	Н	н	ON	ON	ON	ON	OFF	OFF	ON	
4	Н	×	L	Н	L	L	н	OFF	ON	ON	OFF	OFF	ON	ON	
5	н	x	L	Н	L	Н	н	ON	OFF	ON	ON	OFF	ON	ON	
6	н	×	L	Н	Н	Ĺ	н	OFF	OFF	ON	ON	ON	ON	ON	
7	н	x	L	Н	Н	н	н	ON	ON	ON	OFF	OFF	OFF	OFF	1
8	Н	×	н	L	L	L	н	ON	ON	ON	ON	ON	ON	ON	' '
9	н	x	н	L	L	н	н	ON	ON	ON	OFF	OFF	ON	ON	
10	н	X	Н	L	Н	L	H	OFF	OFF	OFF	ON	ON	OFF	ON	i
11	Н	X	Н	L	н	Н	н	OFF	OFF	ON	ON	OFF	OFF	ON	
12	Н	×	н	Н	L	L	н	OFF	ON	OFF	OFF	OFF	ON	ON	
13	н	X	н	н	L	Н	н	ON	OFF	OFF	ON	OFF	ON	ON	
14	н	X	н	Н	н	L	н	OFF	OFF	OFF	ON	ON	ON	ON	
15	н	X	Н	н	Н	Н	н	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
81	Х	Х	Х	Х	Х	Х	L	OFF	OFF	OFF	OFF	OFF	OFF	OFF	2
RBI	н	L	L	L	L	L	L	OFF	OFF	OFF	OFF	OFF	OFF	OFF	3
LT	L	X	X	X	Х	Х	н	ON	ON	ON	ON	ON	ON	ON	4

H = high level, L = low level, X = irrelevant

NOTES: 1. The blanking input (BI) must be open or held at a high logic level when output functions 0 through 15 are desired. The ripple-blanking input (RBI) must be open or high if blanking of a decimal zero is not desired.

- 2. When a low logic level is applied directly to the blanking input (BI), all segment outputs are off regardless of the level of any
- 3. When ripple-blanking input (RBI) and inputs A, B, C, and D are at a low level with the lamp test input high, all segment outputs go off and the ripple-blanking output ( $\overline{\mathsf{RBO}}$ ) goes to a low level (response condition).
- 4. When the blanking input/ripple blanking output (BI/RBO) is open or held high and a low is applied to the lamp-test input, all segment outputs are on.

<sup>1</sup>BI/RBO is wire AND logic serving as blanking input (BI) and/or ripple-blanking output (RBO).



#### '48, 'LS48 FUNCTION TABLE (T2)

DECIMAL OR			INPL	JTS			BI/RBO†			οι	JTPU	TS			NOTE
FUNCTION	LT	RBI	D	С	В	Α		а	b	c _	d	е	f	g	
0	Н	Н	L	L	L.	L	Н	Н	Н	Н	Н	Н	Н	L	
1	Н	x	L	L	L	н	н	L	Н	Н	L	L	L	니	
2	н	x	L	L	Н	L	Н	Н	Н	L	Н	Н	L	H	
3	н	Х	L	L	H	Н	Н	Н	<u>H</u>	H	Н	L	L	Н	
4	Н	X	L	Н	L	L	Н	L	Н	Н	L	L	Н	н	
5	н	х	L	Н	L	Н	н	н	L	Н	Н	L	Н	н	
6	н	x	L	Н	Н	L	H	L	L	Н	Н	Н	Н	н	
7	н	Х	L	Н	Н	H	Н	Н	Н	_H	L	L	L	L	1
8	Н	Х	Н	L	L	L	Н	Н	Н	Н	Н	Н	Н	Н	•
9	Н '	×	Н	L	L	Н	Н	н	Н	Н	L	L	Н	Н	
10	Н	x	Н	L	Н	L	Н	L	L	L	Н	Н	L	Н	
11	Н	Х	Н	L	Н	Н	H	L	L.	H	<u>H</u>	L	L	Н	
12	Н	Х	Н	Н	L	L	Н	L	Н	L	L	L	Н	Н	
13	н	×	н	Н	L	Н	н	Н	L	L	Н	L	Н	Н	
14	Н	×	н	Н	Н	L	н	L	L	L	Н	Н	Н	Н	
15	Н	×	Н	Н	Н	Н	Н	L.	L	L	L	L	L	L	
BI	X	×	Х	X	Х	Х	L	L	L	L	L	L	L	L	2
RBI	н	L	L	L	L	L	L	L	L	L	L	L	L	L	3
LT	L	×	Х	X	Х	X	Н	Н	Н	Н	H	Н	H	Н	4

H = high level, L = low level, X = irrelevant

NOTES: 1. The blanking input (BI) must be open or held at a high logic level when output functions 0 through 15 are desired. The ripple-blanking input (RBI) must be open or high, if blanking of a decimal zero is not desired.

- 2. When a low logic level is applied directly to the blanking input (BI), all segment outputs are low regardless of the level of any other input.
- 3. When ripple-blanking input (RBI) and inputs A, B, C, and D are at a low level with the lamp-test input high, all segment outputs go low and the ripple-blanking output (RBO) goes to a low level (response condition).
- 4. When the blanking input/ripple-blanking output (BI/RBO) is open or held high and a low is applied to the lamp-test input, all segment outputs are high.

tBI/RBO is wire-AND logic serving as blanking input ( $\overline{BI}$ ) and/or ripple-blanking output ( $\overline{RBO}$ ).

'LS49 FUNCTION TABLE (T3)

DECIMAL OR		II	IPUT	s				οι	JTPU	тѕ			NOTE
FUNCTION	D	С	В	Α	BI	а	b	С	d	е	f	g	
0	L	L	L	L	Н	Н	Н	Н	Н	Н	Н	L	
1	L	L	L	Н	н	L	Н	Н	L	L	L	L	
2	L	L	Н	L	Н	н	Н	L	Н	Н	L	Н	
3	L	L	Н	H	Н	Н	Н	Н	H	L	L	H	
4	L	Н	L	L	Н	L	Н	Н	L	L	Н	Н	
5	L	H	L	Н	Н	н	L	Н	Н	L	Н	Н	
6	L	Н	Н	L	Н	L	L	Н	Н	Н	Н	Н	
7	L	Н	H	Н	H	Н	Н	Н	L	L	L	L	1
8	Н	L	L	L	Н	Н	Н	Н	Н	Н	Н	Н	`
9	Н	L	L	Н	Н	н	Н	Н	L	L	Н	Н	
10	Н	L	Н	L	Н	L	L	L	Н	Н	L	Н	
11	н	L	Н	Н	H	L	L	H	Н	L	L	Н	
12	Н	Н	L	L	Н	L	Н	L	L	L	Н	Н	
13	Н	Н	L	Н	H	Н	L	L	Н	L	Н	Н	
14	н	Н	Н	L	Н	L	L	L	Н	Н	Н	Н	
15	l H	Н	Н	Н	Н	L_	L	L	L	L	L	L	
BI	X	X	×	Х	L	L	L	L	L	L	L	L	2


H = high level, L = low level, X = irrelevant


NOTES: 1. The blanking input (BI) must be open or held at a high logic level when output functions 0 through 15 are desired.

 When a low logic level is applied directly to the blanking input (BI), all segment outputs are low regardless of the level of any other input.



#### logic diagrams (positive logic)

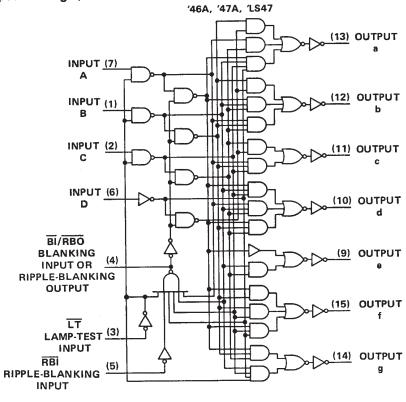


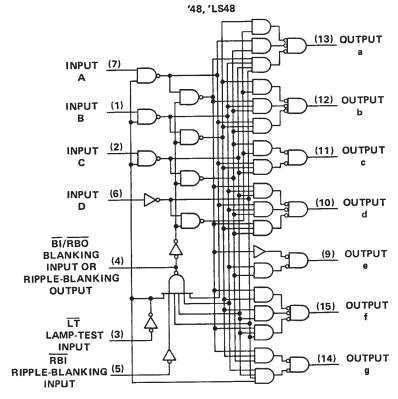

Pin numbers shown are for D, J, N, and W packages.



#### logic diagrams (continued)

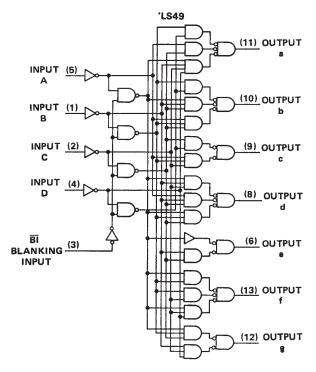


Pin numbers shown are for D, J, N, and W packages.




#### schematics of inputs and outputs


'46A, '47A, '48




'46A, '47A, '48



'46A, '47A




'48




#### schematics of inputs and outputs


'LS47, 'LS48, 'LS49




'LS47, 'LS48, 'LS49




'LS47





'LS49





#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1) .																				7 V
Input voltage																				5.5 V
Current forced into any output in the	off	stat	е																	1 mA
Operating free-air temperature range:	SN	544	6A,	, Si	<b>V</b> 5	44	7A									-!	55°	,C	to	125°C
	SN	744	6A,	, SI	٧7	44	7A										(	D°C	C to	o 70°C
Storage temperature range																				

NOTE 1: Voltage values are with respect to network ground terminal.

#### recommended operating conditions

		5	N5446	Α		N5447	A	5	N7446	A	5	N7447	Α	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	MIN	NOM	MAX	MIN	NOM	MAX	CIVIT
Supply voltage, V <sub>CC</sub>		4.5	5	5.5	4.5	5	5.5	4.75	5	5.25	4.75	5	5.25	V
Off-state output voltage, VO(off)	a thru g			30			15			30			15	V
On-state output current, IO(on)	a thru g			40			40			40			40	mA
High-level output current, IOH	BI/RBO			-200			-200			-200			-200	μА
Low-level output current, IOL	BI/RBO			8			8			8			8	mA
Operating free-air temperature, TA	Α	-55	-	125	-55		125	0	2	70	0		70	°c

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER		TEST CONDIT	IONS†	MIN	TYP‡	MAX	UNIT
VIH	High-level input voltage				2			٧
VIL	Low-level input voltage						0.8	V
VIK	Input clamp voltage		VCC = MIN, II =	-12 mA			-1.5	V
VOH	High-level output voltage	BI/RBO	V <sub>CC</sub> = MIN, V <sub>IH</sub> V <sub>IL</sub> = 0.8 V, I <sub>OH</sub>		2.4	3.7		V
V <sub>OL</sub>	Low-level output voltage	BI/RBO	V <sub>CC</sub> = MIN, V <sub>IH</sub> V <sub>IL</sub> = 0.8 V, I <sub>OL</sub>	1		0.27	0.4	٧
IO(off)	Off-state output current	a thru g	V <sub>CC</sub> = MAX, V <sub>IH</sub> V <sub>IL</sub> = 0.8 V, V <sub>O</sub> (				250	μА
V <sub>O(on)</sub>	On-state output voltage	a thru g	V <sub>CC</sub> = MIN, V <sub>IH</sub> V <sub>IL</sub> = 0.8 V, I <sub>O</sub> (c			0.3	0.4	V
l <sub>l</sub>	Input current at maximum input voltage	Any input except BI/RBO	VCC = MAX, Vi =	5.5 V			1	mA
ЧН	High-level input current	Any input except BI/RBO	VCC = MAX, VI =	2.4 V			40	μА
IIL	Low-level input current	Any input except BI/RBO	V <sub>CC</sub> = MAX, V <sub>I</sub> =	0.4 V			-1.6	mA
		BI/RBO					-4	
los	Short-circuit output current	BI/RBO	V <sub>CC</sub> = MAX				-4	mA
Icc	Supply current		V <sub>CC</sub> = MAX, See Note 2	SN54' SN74'		64 64	85 103	mA

<sup>†</sup>For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

### switching characteristics, VCC = 5 V, TA = 25°C

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
toff	Turn-off time from A input				100	ns
ton	Turn-on time from A input	$C_{L} = 15  pF$ , $R_{L} = 120  \Omega$ ,			100	] ""
toff	Turn-off time from RBI input	See Note 3			100	ns
ton	Turn-on time from RBI input				100	'''

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



 $<sup>\</sup>ddagger$ All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

NOTE 2: ICC is measured with all outputs open and all inputs at 4.5 V.

# SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49 **BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS**

SDLS111 - MARCH 1974 - REVISED MARCH 1988

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1)																•	•	•	•	•	•		•	/ V	
Input voltage																								5.5 V	
Operating free-air temperature range:	SN5448										_										-5	5°C	to	125°C	
Operating nee-an temperature range.	SN7448	•	•	•	•	•	•	•	•	•	-	•	•	•	•	-	·					0°0	C to	70°C	
																					_6	5°C	to	150°C	
Storage temperature range					-													•	•		-0	~ ~	·	.00 0	

NOTE 1: Voltage values are with respect to network ground terminal.

#### recommended operating conditions

			SN544	В		SN7448	8	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	OIVIT
Supply voltage, V <sub>CC</sub>		4.5	5	5.5	4.75	5	5.25	V
	a thru g			-400			-400	μА
High-level output current, IOH	BI/RBO			-200			200	μΑ
	a thru g			6.4			6.4	mA
Low-level output current, IOL	BI/RBO			8			8	"I"A
Operating free-air temperature, TA		-55		125	0		70	°c

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER		TEST CONI	DITIONS†	MIN	TYP‡	MAX	UNIT
VIH	High-level input voltage				2			V
VIL	Low-level input voltage						0.8	V
VIK	Input clamp voltage		V <sub>CC</sub> = MIN, II	= -12 mA			-1.5	V
Voн	High-level output voltage	a thru g	V <sub>CC</sub> = MIN, V V <sub>II</sub> = 0.8 V, I <sub>C</sub>		2.4	3.7		V
10	Output current	a thru g	V <sub>CC</sub> = MIN, V	O = 0.85 V,	-1.3	-2		mA
VOL	Low-level output voltage		V <sub>CC</sub> = MIN, V V <sub>IL</sub> = 0.8 V, I <sub>C</sub>			0.27	0.4	٧
Ц	Input current at maximum input voltage	Any input except BI/RBO	V <sub>CC</sub> = MAX, V	<sub>1</sub> = 5.5 V			1	mA
ЧН	High-level input current	Any input except BI/RBO	V <sub>CC</sub> = MAX, V	= 2.4 V			40	μА
IIL	Low-level input current	Any input except BI/RBO BI/RBO	V <sub>CC</sub> = MAX, V	' <sub>I</sub> = 0.4 V			-1.6 -4	mA
los	Short-circuit output current	BI/RBO	V <sub>CC</sub> = MAX				-4	mA
Icc	Supply current		V <sub>CC</sub> = MAX, See Note 2	SN5448 SN7448		53 53	76 90	-l mA

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTE 2: ICC is measured with all outputs open and all inputs at 4.5 V.

## switching characteristics, VCC = 5 V, TA = 25 °C

PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
<sup>†</sup> PHL Propagation delay time, high-to-low-level output from A input			100	ns
tpLH Propagation delay time, low-to-high-level output from A input	$C_L = 15 \text{ pF}, R_L = 1 \text{ k}\Omega$		100	113
tpHL Propagation delay time, high-to-low-level output from RBI input	See Note 3		100	ns
<sup>†</sup> PLH Propagation delay time, low-to-high-level output from RBI input			100	

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



 $<sup>\</sup>ddagger$ AII typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25 ^{\circ}\text{C}$ .

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1)	7 V
Input voltage	
Peak output current ( $t_W \le 1$ ms, duty cycle $\le 10\%$ )	) mA
Current forced into any output in the off state	mΑ
Operating free-air temperature range: SN54LS47	25°C
SN74LS47	70°C
Storage temperature range	50°C

NOTE 1: Voltage values are with respect to network ground terminal.

#### recommended operating conditions

		S	N54LS4	17	S	N74LS4	17	
		MIN	NOM	MAX	MIN	NOM	MAX	TINU
Supply voltage, V <sub>CC</sub>		4.5	5	5.5	4.75	5	5.25	V
Off-state output voltage, VO(off)	a thru g		***	15			15	V
On-state output current, IO(on)	a thru g			12			24	mA
High-level output current, IOH	BI/RBO			-50			-50	μА
Low-level output current, IOL	BI/RBO			1.6			3.2	mA
Operating free-air temperature, TA		-55		125	0		70	°c

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER		TEST COM	IDITIONS†	S	N54LS4	17	S	N74LS	47	
	FARAMETER		1EST CON	DITIONS.	MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	UNIT
VIH	High-level input voltage				2			2			V
VIL	Low-level input voltage						0.7			0.8	V
VIK	Input clamp voltage		V <sub>CC</sub> = MIN,	I <sub>1</sub> = -18 mA			-1.5			-1.5	V
v <sub>OH</sub>	High-level output voltage	BI/RBO	V <sub>CC</sub> = MIN, V <sub>IL</sub> = V <sub>IL</sub> max,	V <sub>IH</sub> = 2 V, I <sub>OH</sub> = -50 μA	2.4	4.2		2.4	4.2		V
VOL	Low-level output voltage	BI/RBO	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V,	I <sub>OL</sub> = 1.6 mA		0.25	0.4		0.25	0.4	v
			VIL = VIL max	I <sub>OL</sub> = 3.2 mA					0.35	0.5	
IO(off)	Off-state output current	a thru g	V <sub>CC</sub> = MAX, V <sub>IL</sub> = V <sub>IL</sub> max,	V <sub>IH</sub> = 2 V, V <sub>O(off)</sub> = 15 V			250			250	μΑ
V <sub>O(on)</sub>	On-state output voltage	a thru q	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V,	l <sub>O(on)</sub> = 12 mA		0.25	0.4		0.25	0.4	V
0 (011)			V <sub>IL</sub> = V <sub>IL</sub> max	1 <sub>O(on)</sub> = 24 mA					0.35	0.5	
I <sub>I</sub>	Input current at maximur	n input voltage	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 7 V			0.1			0.1	mA
IJН	High-level input current		V <sub>CC</sub> = MAX,	V <sub>I</sub> = 2.7 V			20			20	μА
I <sub>I</sub> L	Low-level input current	Any input except BI/RBO	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 0.4 V			-0.4			-0.4	mA
		BI/RBO					-1.2			-1.2	
Ios	Short-circuit output current	BI/RBO	V <sub>CC</sub> = MAX		-0.3		-2	-0.3		-2	mA
1cc	Supply current		V <sub>CC</sub> = MAX,	See Note 2		7	13		7	13	mA

<sup>†</sup>For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡All typical values are at  $V_{CC}$  = 5 V,  $T_A$  = 25°C. NOTE 2:  $I_{CC}$  is measured with all outputs open and all inputs at 4.5 V.

#### switching characteristics, VCC = 5 V, TA = 25 °C

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
toff	Turn-off time from A input				100	
ton	Turn-on time from A input	$C_L = 15 \text{ pF}, R_L = 665 \Omega,$			100	ns
toff	Turn-off time from RBI input, outputs (a-f) only	See Note 3			100	
ton	Turn-on time from RBI input, outputs (a-f) only				100	ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



# SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49 **BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS**

SDLS111 - MARCH 1974 - REVISED MARCH 1988

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1	) .																			7 V	
Input voltage						_	_	_			_									7 V	•
Operating free-air temperature ra	ange:	SN	541	_S4	8													55°	C to	125°C	,
		SN	741	_\$4	8													U	Ut	o /U C	,
Storage temperature range													 •	•			-6	35°	C to	150°C	,

NOTE 1: Voltage values are with respect to network ground terminal.

#### recommended operating conditions

		s	N54LS4	18	S	N74LS4	18	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	OWIT
Supply voltage, VCC		4.5	5	5.5	4.75	5	5.25	٧
	a thru g			-100			-100	μА
High-level output current, IOH	BI/RBO			-50			-50	μ^
	a thru g			2			6	mA
Low-level output current, IOL	BĪ/RBO			1.6			3.2	IIIA
Operating free-air temperature, TA		-55		125	0		70	°c

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	0.0.0.445750		TEST CON	DITIONS	S	N54LS4	18	S	N74LS4	8	UNIT
	PARAMETER		TEST CON	י פאטווות.	MIN	TYP‡	MAX	MIN	TYP <sup>‡</sup>	MAX	Olvii
VIH	High-level input voltage	-			2			2			V
VIL	Low-level input voltage						0.7			0.8	V
VIK	Input clamp voltage		V <sub>CC</sub> = MIN,	l <sub>1</sub> = -18 mA			-1.5			-1.5	V
Voн	High-level output voltage	a thru g and BI/RBO	V <sub>CC</sub> = MIN, V <sub>IL</sub> = V <sub>IL</sub> max,	V <sub>IH</sub> = 2 V, I <sub>OH</sub> = MAX	2.4	4.2		2.4	4.2		v
I <sub>O</sub>	Output current	a thru g	V <sub>CC</sub> = MIN, Input conditions	$V_O = 0.85 V$ , as for $V_{OH}$	-1.3	-2		-1.3	-2		mA
		a thru a	V <sub>CC</sub> = MIN,	I <sub>OL</sub> = 2 mA		0.25	0.4		0.25	0.4	V
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	Low-level output voltage	a thru g	V <sub>IH</sub> = 2 V, V <sub>IL</sub> = V <sub>IL</sub> max	IOL = 6 mA					0.35	0.5	
VOL	LOW-level output voltage	BI/RBO	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V,	I <sub>OL</sub> = 1.6 mA		0.25	0.4		0.25	0.4	l ,
		ВІ/КВО	VIH = VIL max	I <sub>OL</sub> = 3.2 mA					0.35	0.5	1 - 1
11	Input current at maximum input voltage	Any input except BI/BRO	V <sub>CC</sub> = MAX,	V <sub>1</sub> = 7 V			0.1			0.1	mA
ΊΗ	High-level input current	Any input except BI/RBO	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 2.7 V			20			20	μΑ
111	Low-level input current	Any input except BI/RBO	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 0.4 V			-0.4			-0.4	mA
		BI/RBO					-1.2			-1.2	<u> </u>
los	Short-circuit output current	BI/RBO	V <sub>CC</sub> = MAX		-0.3		-2	-0.3		-2	mA
¹cc	Supply current		V <sub>CC</sub> = MAX,	See Note 2		25	38		25	38	mA

<sup>†</sup>For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

## switching characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25 \, ^{\circ}\text{C}$

PARAMETER	TEST CONDITIONS	MIN TY	P MAX	UNIT
tPHL Propagation delay time, high-to-low-level output from A input	$C_L = 15 \text{ pF}, R_L = 4 \text{ k}\Omega,$		100	ns
tplH Propagation delay time, low-to-high-level output from A input	See Note 3		100	115
tpHL Propagation delay time, high-to-low-level output (a-f only) from RBI input	$C_L = 15 \text{ pF}, R_L = 6 \text{ k}\Omega,$		100	ns
tPLH Propagation delay time, low-to-high-level output (a-f only) from RBI input	See Note 3		100	

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



 $<sup>\</sup>ddagger$ All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A 25^{\circ}$ C.

NOTE 2: I<sub>CC</sub> is measured with all outputs open and all inputs at 4.5 V.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1)															7 V
Input voltage															7 V
Current forced into any output in the off state															1 mA
Operating free-air temperature range: SN54LS49												E	55°(	C to	125°C
SN74LS49													U	C	to /U C
Storage temperature range				 -	•	-		-	-	-		-6	5°(	C to	150°C

NOTE 1: Voltage values are with respect to network ground terminal.

#### recommended operating conditions

	S	N54LS	19	S	N74LS	19	UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	O.T.
Supply voltage, V <sub>CC</sub>	4.5	5	5.5	4.75	5	5.25	V
High-level output voltage, VOH			5.5			5.5	V
Low-level output current, IOL			4			В	mA
Operating free-air temperature, TA	-55		125	0		70	°C

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	PARAMETER	TEST COA	NDITIONS†	S	N54LS4	19	S	N74LS4	19	
	TANAMETER	1231 CON	ADITIONS,	MIN	TYP‡	MAX	MIN	TYP‡	MAX	UNIT
VIH	High-level input voltage			2			2			V
VIL	Low-level input voltage					0.7			0.8	V
VIK	Input clamp voltage	VCC = MIN,	I <sub>I</sub> = -18 mA			-1.5			-1.5	V
ІОН	High-level output current	V <sub>CC</sub> = MIN, V <sub>IL</sub> = V <sub>IL</sub> max,	V <sub>IH</sub> = 2 V, V <sub>OH</sub> = 5.5 V			250			250	μА
VOL	Low-level output voltage	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V,	IOL = 4 mA		0.25	0.4		0.25	0.4	V
		Vic = Vic max	1 <sub>OL</sub> = 8 mA					0.35	0.5	] *
Ц	Input current at maximum input voltage	V <sub>CC</sub> = MAX,	V <sub>1</sub> = 7 V			0.1			0.1	mA
IH	High-level input current	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 2.7 V			20			20	μΑ
IL	Low-level input current	V <sub>CC</sub> = MAX,	V <sub>1</sub> = 0.4 V			-0.4			-0.4	mA
lcc	Supply current	V <sub>CC</sub> = MAX,	See Note 2		8	15		8	15	mA

<sup>&</sup>lt;sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

#### switching characteristics, VCC = 5 V, TA = 25°C

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
tPHL	Propagation delay time, high-to-low-level output from A input	$C_L = 15 \text{ pF}, R_L = 4 \text{ k}\Omega,$			100	
<sup>†</sup> PLH	Propagation delay time, low-to-high-level output from A input	See Note 3			100	ns
tPHL	Propagation delay time, high-to-low-level output (a-f only) from RBI input	$C_L = 15 pF$ , $R_L = 6 k\Omega$ ,			100	
tPLH	Propagation delay time, low-to-high-level output (a-f only) from $\overline{\text{RBI}}$ input	See Note 3			100	ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



 $<sup>\</sup>ddagger$ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C. NOTE 2: I<sub>CC</sub> is measured with all outputs open and all inputs at 4.5 V.

#### **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1999, Texas Instruments Incorporated

## This datasheet has been downloaded from:

www. Data sheet Catalog.com

Datasheets for electronic components.